


// WATER & LIQUIDS

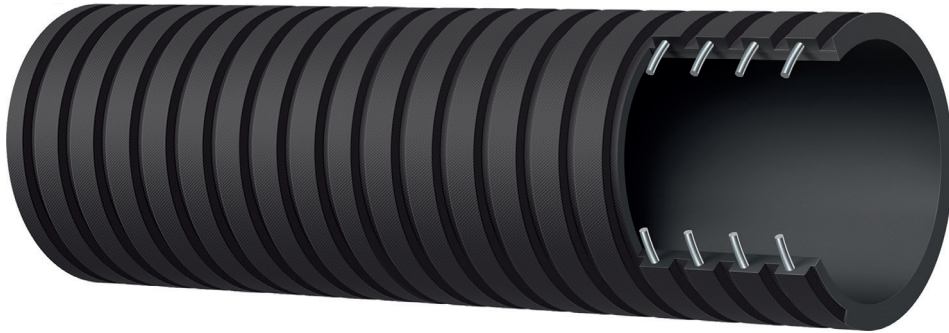

// 2P1AA

EVOLUTION PLUS

Water-slurry S&D 10 bar (150 psi) - Square corrugated - Extra flexible

Tube: black synthetic rubber.

Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: black synthetic rubber, abrasion and ozone resistant.

Application: water suction and delivery. Special construction for maximum flexibility for slurry tankers.

Constant operation: -30 °C +80 °C (-22 °F +176 °F)

↔		↔		↻		↻		⤴		⌋	⚖	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
76,0	3"	90,00	3,54	10	150	30	450	152	5,98	90	2,510	1,69
102,0	4"	118,00	4,65	10	150	30	450	204	8,03	90	3,590	2,42
152,0	6"	168,00	6,61	10	150	25	375	456	17,95	80	6,700	4,51
203,0	8"	221,00	8,70	10	150	25	375	812	31,97	70	11,250	7,57