


// FOOD & BEVERAGES

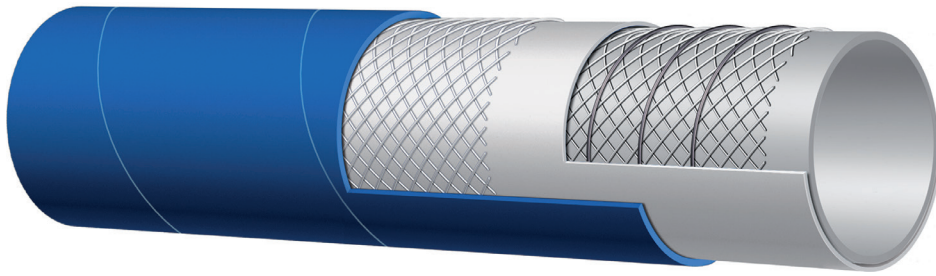

// 400LE

EVOLUTION

Multi-food S&D 10 bar (150 psi)

FDA - D.M. 21/03/73

Tube: white NBR.

Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: blue NR/EPDM - abrasion and ozone resistant.

Application: liquid and fat food-alcoholic beverages suction and delivery - max 75%. Special construction for maximum flexibility. Sterilize with 130 °C (266 °F) steam for 30 minutes or with 5% soda solution.

Constant operation: -30 °C +100 °C (-22 °F +212 °F)

Application: bulk material suction and delivery. Special construction for maximum flexibility.

Constant operation: -30 °C +80 °C (-22 °F +176 °F)



↔		↔		↻		↻		↷		⌋	⚗	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft
25,0	1"	36,00	1,42	10	150	30	450	50	1,97	100	0,690	0,47
32,0	1 1/4"	43,00	1,69	10	150	30	450	64	2,52	100	0,840	0,57
38,0	1 1/2"	49,00	1,93	10	150	30	450	76	2,99	100	0,980	0,66
51,0	2"	62,00	2,20	10	150	30	450	102	4,02	100	1,270	0,86
63,0	2 1/2"	76,00	2,44	10	150	30	450	126	4,96	90	2,020	1,37
76,0	3"	89,00	2,99	10	150	30	450	152	5,98	90	2,400	1,62
102,0	4"	116,00	3,50	10	150	30	450	204	8,03	90	3,380	2,28