


// FOOD & BEVERAGES

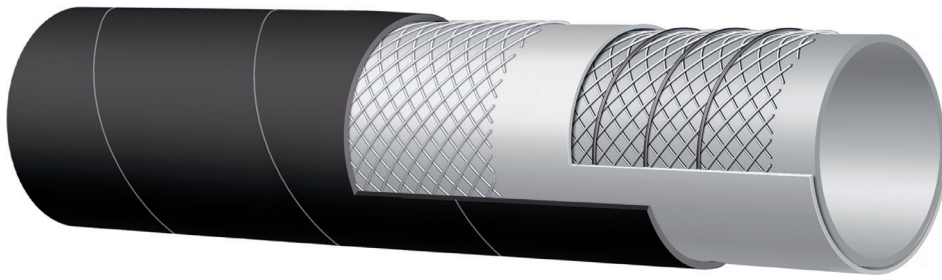

// 401LA

EVOLUTION

Milk tanker 10 bar (150 psi) - Hard wall
FDA arrêté du 09/11/94 D

Tube: white NR.

Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: black SBR/NR - abrasion and ozone resistant.

Application: liquid food suction and delivery. Special construction for maximum flexibility in milk tanker applications. Sterilize with 110 °C (230 °F) steam for 10 minutes or with 5% soda solution.

Constant operation: -40 °C +80 °C (-40 °F +176 °F)



↔		↔		⬇		⬇		⤴		⌒		⌒	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft	
51,0	2"	64,00	2,52	10	150	30	450	102	4,02	100	1,410	0,95	
63,0	2 1/2"	77,00	3,04	10	150	30	450	126	4,96	90	2,150	1,45	
76,0	3"	90,00	3,54	10	150	30	450	152	5,98	90	2,550	1,72	